

RIGOL

Data Sheet

DG1000 Series Dual-Channel Function/Arbitrary Waveform Generator

Product Overview

DG1000 series Dual-Channel Function/Arbitrary Waveform Generators adopt DDS technology, which enables to generate stable, high-precision, pure and low distortion signals.



Applications

- Analog Sensor
- Practical Environment Signals
- Circuit Function Test
- IC chip Test

Easy to Use Design




- A variety of display modes
- Clear graphical interface
- Support for Chinese and English menu and input
- Push-help makes information getting more convenient.
- File management (support for USB flash device and local storage)

Main Features

- Adopt advanced DDS technology; dual channel output; 100 MSa/s maximum sampling rate; 14 bits vertical accuracy
- Output 5 standard waveforms; built-in 48 arbitrary waveforms
- Abundant modulation functions: AM, FM, PM, FSK, linear/logarithm sweep and burst
- Abundant output and input: waveform output; synchronous signal output; external modulation source, external clock reference (10 MHz) input, external trigger input
- Unique channel coupling and channel copy
- Built-in high precision and wide band counter, the measurement range: 100 mHz ~ 200 MHz (single channel)
- Standard configuration interfaces: USB Device & USB Host, and support U-disc storage
- Seamlessly interconnect with DS1000 series digital oscilloscope
- Powerful arbitrary waveform editing software "UltraWave"
- Support remote control by commands

Oct. 2011
RIGOL Technologies, Inc.

➤ Dual Channel Output, Built-in and Editable Arb Waveform

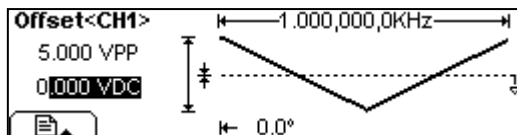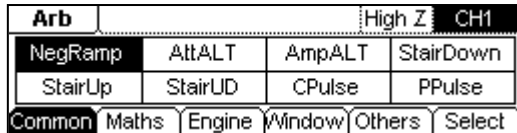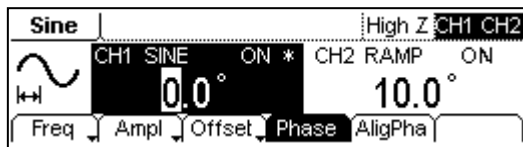

Dual Channel Output: Separately setup the waveform and parameter as well as the output state of two channels. The phases from two channels could be synchronous while outputting based on the “**AligPha**” function from operation menu.

Built-in Waveform Output: The instrument has 48 built-in arbitrary waves (contains DC) which including common, math, engineering, window function and other common waves.




Editable Arb Waveform: Enable to edit and output a arbitrary wave with 14bits, 4kpts. In addition, the instrument provides 10 nonvolatile memories for storing custom arbitrary waves. According to Ultrawave, more waves could be edited and saved.

➤ Abundant Modulation Functions, Sweep, Burst

Abundant Modulation Functions: Support AM, FM, PM and FSK, the modulated waveforms are intuitively shown on the screen. It can be used in Education & Training area proverbially.

Sweep: It can generate “sweep” from the start frequency to the stop frequency during appointed sweep time (1 ms ~ 500 s) you specify. Sweeping can be generated by Sine, Square, Ramp or Arbitrary waveforms.

Burst: It can generate pulse sequence for a variety of waveform function, and the waveform could continuously cycle within specific time or apply external gating signal.

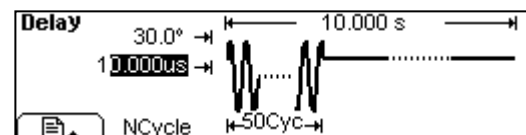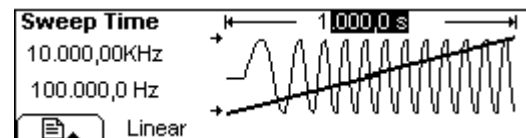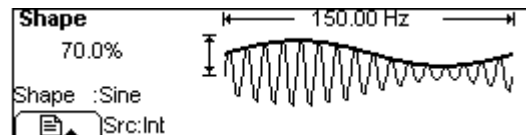


➤ Channel Coupling and Copy



Channel Coupling: Once you setup the base channel and the Frequency/Phase deviation of the two channels, the Frequency/Phase of the other one will vary with the base channel and will still keep the deviation you have selected.

Channel Copy: According to this function, the parameters from one channel could be copied to another channel with no change of the waveform shape.

➤ Built-in Frequency Counter

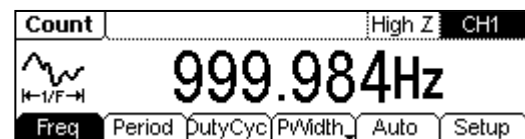


The counter could be used to measure these parameters: frequency, period, duty cycle, positive pulse width and negative pulse width within the range of 100 mHz to 200 MHz.

Two modes of counter are available:

Auto mode: The coupling mode, sensitivity, trigger level and the switch of high frequency reject could be set automatically.

Manual mode: DC/AC, sensitivity (low, mid, high), trigger level, the switch of high frequency reject could be set manually.

➤ Powerful Waveform Editing Software "UltraWave"

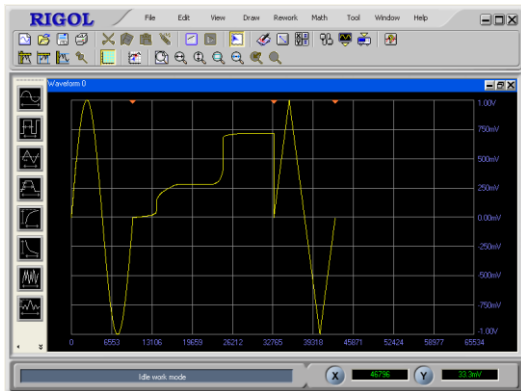

In order to meet the most basic needs of users, UltraWave provides 9 standard waveforms: Sine, Square, Ramp, Pulse, ExpRise, ExpFall, Sinc, Noise and DC. In addition, hand drawing, line (point by point) drawing and arbitrary points drawing are also offered to make it easier to create complex waveforms and to edit multiple waves simultaneously through the multi-file management interface.

Either, UltraWave has following utilitarian functions:

- Windows operation: enable to perform math operations such as "+", "-", "×" for the waves in two windows.
- Absolute operation: enable to perform absolute operation for the selected waves.
- Filter: enable to perform low pass filtering or smoothing for the whole wave.
- Save the arbitrary wave that has been created as the format of .txt (text file), .csv (CSV file) and .rdf (arbitrary waveform file).
- Read the wave files stored as the format of .Wfm from DS series Digital Oscilloscope.
- Print waveforms.
- Download the waves have been created to the internal storage of DG1000.

Specifications

All the specifications below apply to DG1000 series Dual-Channel Function/ Arbitrary Waveform Generator unless where noted. To come up to these specifications, two conditions must be met firstly:

- The instrument must have been operated continuously for 30 minutes under the specified operating temperature (18°C ~ 28°C).
- Variation of the operating temperature should be within 5 °C.

Note: All specifications are guaranteed unless where marked "typical".

Specifications

| Frequency | | |
|-------------------------|---|-----------------------|
| Waveforms | Sine, Square, Ramp, Triangle, Pulse, Noise, Arb | |
| | DG1022 | DG1022A |
| Sine | 1 μHz ~ 20 MHz | 1μHz ~ 25MHz |
| Square | 1 μHz ~ 5 MHz | 1μHz ~ 5MHz |
| Pulse | 500 μHz ~ 3 MHz | 500μHz ~ 5MHz |
| Ramp/Triangle | 1 μHz ~ 150 kHz | 1μHz ~ 500kHz |
| White Noise | 5 MHz bandwidth (-3 dB) | 5MHz bandwidth (-3dB) |
| Arb. | 1 μHz ~ 5 MHz | 1μHz ~ 5MHz |
| Resolution | 1 μHz | |
| Accuracy | ±50 ppm in 90 days ±100 ppm in 1 year 18°C ~ 28°C | |
| Temperature Coefficient | < 5 ppm/°C | |

| Sine Wave Spectrum Purity | | | | | |
|---|--|----------------|---|----------------|--|
| Harmonic Distortion | CH1 | | CH2 | | |
| | ≤ 1 Vpp | > 1 Vpp | ≤ 1 Vpp | > 1 Vpp | |
| DC-1 MHz | -45 dBc | -45 dBc | -45 dBc | -45 dBc | |
| 1 MHz - 5 MHz | -45 dBc | -40 dBc | -45 dBc | -40 dBc | |
| 5 MHz - 20 MHz | -45 dBc | -35 dBc | -45 dBc | -35 dBc | |
| Total Harmonic Distortion | DC ~ 20 kHz, 1 Vpp $< 0.2\%$ | | | | |
| Spurious Signal (non-harmonic) | DC ~ 1 MHz < -70 dBc 1 MHz ~ 10 MHz < -70 dBc + 6 dB/octave | | | | |
| Phase Noise | 10kHz Offset, -108 dBc / Hz (typical) | | | | |
| Square Wave | | | | | |
| Rise/Fall Time | < 20 ns (10% ~ 90%), (typical, 1 kHz, 1 Vpp) | | | | |
| Overshoot | $< 5\%$ (Typical, 1 kHz, 1 Vpp) | | | | |
| Duty Cycle | 1 μ Hz ~ 3 MHz | | 20% ~ 80% | | |
| | 3 MHz (not contain) ~ 4 MHz | | 40% ~ 60% | | |
| | 4 MHz (not contain) ~ 5 MHz | | 50% | | |
| Asymmetry (below 50% Duty Cycle) | 1% of period + 20 ns (typical, 1 kHz, 1 Vpp) | | | | |
| Jitter | 6 ns + 0.1% of period (typical, 1 kHz, 1 Vpp) | | | | |
| Ramp Wave | | | | | |
| Linearity | $< 0.1\%$ of peak output (typical, 1 kHz, 1 Vpp, 100% Symmetry) | | | | |
| Symmetry | 0% to 100% | | | | |
| Pulse Wave | | | | | |
| Pulse Width | 2000 s max period; 20 ns min period; 1 ns resolution | | | | |
| Overshoot | $< 5\%$ | | | | |
| Jitter | 6 ns + 100 ppm of period | | | | |
| Arb Wave | | CH1 | CH2 | | |
| Waveform Length | 4k points | | 1k points | | |
| Vertical Resolution | 14 bits (including sign) | | 10 bits (including sign) | | |
| Sampling Rate | 100 MSa/s | | 100 MSa/s | | |
| Minimum Rising /Falling Time | 35 ns (Typical) | | 35 ns (typical) | | |
| Jitter (RMS) | 6 ns + 30 ppm (typical) | | 6 ns + 30 ppm (typical) | | |
| Nonvolatile Storage (Total:10 Waveforms) | 10 waveforms | | 10 waveforms | | |
| Output Characteristics | | DG1022 | | DG1022A | |
| Amplitude (50 Ω) | CH1 | CH2 | CH1 | CH2 | |
| | 2 mVpp ~ 10 Vpp | 2 mVpp ~ 3 Vpp | ≤ 20 MHz: 2 mVpp ~ 10 Vpp; > 20 MHz: 2 mVpp ~ 5 Vpp; | 2 mVpp ~ 3 Vpp | |
| Vertical Accuracy (1 kHz Sine) ^[1] | $\pm(2\%$ of setting + 2 mVpp) | | $\pm(2\%$ of setting + 2 mVpp) | | |
| Amplitude Flatness (relative to 1 kHz, 5 Vpp Sine wave) ^[1] | < 100 kHz | 0.1 dB | < 100 kHz | 0.1 dB | |
| | 100 kHz ~ 5 MHz | 0.15 dB | 100 kHz ~ 5 MHz | 0.15 dB | |
| | 5 MHz ~ 20 MHz | 0.3 dB | 5 MHz ~ 25 MHz | 0.3 dB | |
| DC Offset | CH1 | | CH2 | | |

| | | |
|---|--|--|
| Range (DC) | 5 V (50 Ω) 10 V (High Z) | 1.5 V (50 Ω) 3 V (High Z) |
| Offset Accuracy | $\pm(2\%$ of the Offset Setting + 2 mV) | $\pm(2\%$ of the Offset Setting + 2 mV) |
| Waveform Output | CH1 | CH2 |
| Impedance | 50 Ω (typical) | 50 Ω (typical) |
| Protection ^[2] | Short-circuit protected, overload relay automatically disables main output | Short-circuit protected |
| AM (CH1) | | |
| Carrier Waveforms | Sine, Square, Ramp, Arb (except DC) | |
| Source | Internal/ External | |
| Modulation Waveforms | Sine, Square, UpRamp, DnRamp, Triangle, Noise, Arb (2 mHz to 20 kHz) | |
| Depth | 0% ~ 120% | |
| FM (CH1) | | |
| Carrier Waveforms | Sine, Square, Ramp, Arb (except DC) | |
| Source | Internal/ External | |
| Modulation Waveforms | Sine, Square, UpRamp, DnRamp, Triangle, Noise, Arb (2 mHz to 20 kHz) | |
| Frequency Deviation | DC ~ 10 MHz | |
| PM (CH1) | | |
| Carrier Waveforms | Sine, Square, Ramp, Arb (except DC) | |
| Source | Internal/ External | |
| Modulation waveforms | Sine, Square, UpRamp, DnRamp, Triangle, Noise, Arb (2 mHz to 20 kHz) | |
| Phase Deviation | 0 ~ 360° | |
| FSK (CH1) | | |
| Carrier Waveforms | Sine, Square, Ramp, Arb (except DC) | |
| Source | Internal/ External | |
| Modulating Waveforms | 50% duty cycle square (2 mHz to 50 kHz) | |
| Sweep (CH1) | | |
| Carrier Waveforms | Sine, Square, Ramp, Arb (except DC) | |
| Type | Linear or Logarithmic | |
| Direction | Up or Down | |
| Sweep Time | 1 ms to 500 s \pm 0.1% | |
| Trigger Source | Internal/External/Manual | |
| Burst (CH1) | | |
| Waveforms | Sine, Square, Ramp, Pulse, Noise, Arb (except DC) | |
| Types | Count (1 to 50,000 periods), infinite, gated | |
| Start Phase | -180° to +180° | |
| Internal Period | 1 μ s – 500 s \pm 1% | |
| Gate Source | External Trigger | |
| Trigger Source | Internal/External/Manual | |
| Rear Panel Connector^[3] | | |
| External Modulation | \pm 5 Vpk = 100% modulation 5 k Ω input impedance | |
| External Trigger | TTL compatible | |

| Trigger Input | | | |
|---|--|---|---------------------------|
| Input Level | TTL compatible | | |
| Slope | Rising or falling (selectable) | | |
| Pulse Width | > 100 ns | | |
| Input Impedance | > 10 k Ω , DC coupled | | |
| Latency | Sweep: < 500 μ s (typical) | | |
| | Burst: < 500 ns (typical) | | |
| Trigger Output | | | |
| Electrical Level | TTL compatible | | |
| Pulse Width | > 400 ns (typical) | | |
| Output Impedance | 50 Ω (typical) | | |
| Maximum Rate | 1 MHz | | |
| Sync Output (CH1) | | | |
| Electrical Level | TTL compatible | | |
| Pulse Width | > 50 ns (typical) | | |
| Output Impedance | 50 Ω (typical) | | |
| Maximum Frequency | 2 MHz | | |
| Counter Specification | | | |
| Function | Frequency, period, positive/negative Pulse width, Duty cycle | | |
| Frequency Range | Single channel: 100 mHz ~ 200 MHz | | |
| Frequency Resolution | 6 digits/second | | |
| Voltage Range and Sensitivity (non-modulation signal) | | | |
| Auto mode | 1 Hz ~ 200 MHz | 200 mVpp ~ 5 Vpp | |
| Manual mode | DC coupled | DC offset range | ± 1.5 VDC |
| | | 100 mHz ~ 100 MHz | 20 mVRMS ~ ± 5 Vac+dc |
| | AC coupled | 100 MHz ~ 200 MHz | 40 mVRMS ~ ± 5 Vac+dc |
| | | 1 Hz ~ 100 MHz | 50 mVpp ~ ± 5 Vpp |
| | 100 MHz ~ 200 MHz | 100 mVpp ~ ± 5 Vpp | |
| Pulse width and Duty cycle Measure | 1 Hz ~ 10 MHz (100 mVpp ~ 10 Vpp) | | |
| Input adjust | Input impedance | 1 M Ω | |
| | Coupling mode | AC, DC | |
| | High frequency restrain | High frequency noise restrain (HFR) On or Off | |
| | sensitivity | Low, Medium, High | |
| Trigger mode | The trigger level can adjust manually/ automatically | | |
| | Trigger level range: ± 3 V (0.1% to 100%) | | |
| | Resolution: 6 mV | | |

Remark:

[1] In atypical condition, the specification may have minor differences.

[2] In normal temperature, short circuit in less than half hour will be tolerable.

- CH1 is provided with **Overvoltage** function. When the output terminal is connected to an external circuit, the relationships between the output voltage "Vout" of generator and the voltage "Vin" possibly generated by external circuit are:

If $V_{out} \leq 1V_{DC}$, the protective range of Vin is $\pm 6.5V$

If $V_{out} > 1V_{DC}$, the protective range of Vin is $\pm 12.5V$

Thereinto, $V_{out} = \text{Amplitude}/2 + |\text{Offset}|$, the Amplitude and Offset are the parameters of the signal outputted from generator.

The generator will cut off the output automatically when Vin exceeds the specified range.

- The voltage inputted to the output connector of CH2 should be within $\pm 3V$.

[3] External input voltage should be within $\pm 5V$, or else the generator may be damaged.

General Specifications

| Display | | |
|--------------------------------|--|---------|
| Display Type | Black and White LCD Screen | |
| Display Resolution | 256 Horizontal x 64 Vertical | |
| Grey Degree | 4 Level Grey | |
| Display Contrast (typical) | 150 : 1 | |
| Backlight Brightness (typical) | 300 nit | |
| Power Supply | | |
| Supply Voltage | 100 ~ 240 VAC _{RMS} , 45 ~ 440 Hz, CAT II | |
| Power Consumption | Less than 40 W | |
| Fuse | 2 A, T Level, 250 V | |
| Environment | | |
| Ambient Temperature | Operation: 10°C ~ +40°C | |
| | Non-operation: -20°C ~ +60°C | |
| Cooling Method | Natural cooling | |
| Humidity Range | Below +35°C: ≤90% relative humidity | |
| | +35°C~+40°C: ≤60%relative humidity | |
| Height above sea level | Operation: below 3,000m | |
| | Non-operation: below 15,000m | |
| Mechanism | | |
| Dimension | Width | 232 mm |
| | Height | 108 mm |
| | Depth | 288 mm |
| Weight | Net Weight | 2.65 kg |
| | Gross Weight | 4 kg |
| IP Protection | | |
| IP2X | | |
| Calibration Interval | | |
| One year suggested | | |

Ordering Information

Name of Product

RIGOL DG1000 series Dual-Channel Function/Arbitrary Waveform Generator

Standard Accessories

- A Power Cord that fits the standard of destination country
- A CD (including User's Guide and application software)
- A Quick Guide

Optional Accessories

- BNC Cable
- BNC to Alligator Clip Cable
- USB Data Cable
- 40dB Attenuator
- Power Amplifier

Contact Us

If you have any problem or requirement when using our products, please visit: <http://www.rigol.com>.

Warranty

Thank you for choosing **RIGOL** products!

RIGOL Technologies, Inc. warrants that this product will be free from defects in materials and workmanship from the date of shipment. If a product proved defective within the respective period, **RIGOL** will provide repair or replacement as described in the complete warranty statement.

For the copy of complete warranty statement or maintenance, please contact with your nearest **RIGOL** sales and service office.

RIGOL do not provide any other warranty items except the one being provided by this summary and the warranty statement. The warranty items include but not being subjected to the hint guarantee items related to tradable characteristic and any particular purpose. **RIGOL** will not take any responsibility in cases regarding to indirect, particular and ensuing damage.